



COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

Manhattan Community Board 4's (MCB4) recommendation is based on a voted at its July 23, 2025 Full Board Meeting with 40 members in favor of the recommendation, 0 member opposed, 0 members abstaining and 0 present but not eligible.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name: District Local		
Cafe Address: 72 7 Avenue, New Yo	ork, NY, 10011	
Application Number: 20240726010028	8	
CB Review Deadline (on date or next bus NYCDOT Internal Use Only	siness day): 8/9/2025	
Sidewalk Cafe Setup Feedback:	Community Board chooses to N	WAIVE review
Comments related to the cafe's physical footpr	rint and dimensions:	
Comments related to pedestrian flow (i.e., visbi	ility, safety , potential crowding).	
BOANDARX	visting curb use (i.e., planters, bike racks, bus stops): w, either approval, denial, or approval with modifications rel	ating to
Community Board recommends approval	Community Board recommends denia	al
Community Board recommends approval w/ Recommended modifications (only if approved Applicant acknowledges and agrees to mod		
Applicant acknowledges BUT does NOT agr	ree with modifications relating to the above referenced appl T with documentation of such agreement for NYC DOT's co	
Nelly Gonzalez	Mangles 81712	25

Community Board Authorizing Name

Community Board Authorizing Signature

Date

RESTAURANT DETAILS

Food Service Establishment Permit (FSEP)

FSEP#: 50094008

Expiration Date: 06/30/2026 DOHMH Status: CURRENT

Business Legal Name: DISTRICT 727 INC Assumed Name: DISTRICT LOCAL

Business Address: 72 7 AVENUE, NEW YORK, NY 10011

Venue Type: Pub/Gastropub

Last updated from DOHMH: 06/30/2025

Restaurant Information

Entity Type: Limited Liability Corporation (LLC)

Phone: (212) 930-6677

Email Address: info@districtlocalnyc.com

DOS Information DOS ID#: 5347984

Process Name: District Local

DOS Address: 72 7th Avenue, New York, New York 10011

NYS Liquor Authority Information

NYSLA Serial No: 1314390 License Type: On-Premises

Name of License: Michael Geddes Title of Representative: Owner Name of Certificate Holder: 727

Business hours

Sun: 12:00 PM- 1:00 AM Mon: 4:00 PM- 2:00 AM Tues: 4:00 PM- 2:00 AM Wed: 4:00 PM- 3:00 AM Thurs: 4:00 PM- 3:00 AM Fri: 4:00 PM- 3:00 AM Sat: 12:00 PM- 3:00 AM











ECTION 1: Site Plan This Site Plan form is required to be uploaded in the "Sidewalk Site Plan" field of your online application. Refer to the How to Apply page in the Dining Out NYC website for more information about the application process.			Mw York City Fre Artains Marc Viant Rack Commission Sidewalk Cafe	
dentify Clear Path Requireme		Setup Area Identification :		Plan Form
our sidewalk cafe can be ound by identifying your corridor type on the DOT's		Please check this box if you plan to have outdoor dining located partially within private property. If you are uncertain, please request records from your property owner/manager.	Applicant Name:	Michael Gedde
	C3- Neighborhood Corridor, Community Connector, or Baseline	Please check this box if all or part of your sidewalk cafe is in a sidewalk widening area, developed pursuant to the NYC Zoning	Restaurant Name:	District Local
	Street (o reet clear Paul)	Resolution. If so, indicate the property line in the site plan drawing below.	FSEP Number:	50094008
Use the space below to draw or upload your Site Plan representing your cafe perimeters, furniture, and clearances.			Drawing Requirements	
			shown by: • Line represer	stablishment frontage nting the establishment the sidewalk y shown as:

Street names:
Labels on each street

Building entrances shown as:

Label

Cafe perimeter shown as:
Lines indicating perimeter
Length and width

Sidewalk shown as:
Line representing street curb
Width measured from building line to curb line

Elements (in Section 2 of this form)
within 15 feet of cafe perimeter, shown
as:
Lines or symbols
Distance from cafe perimeter
Labels

Set-up furniture (tables, chairs, etc.) shown as:

Lines or symbols at approximate location within setup


Utility coverings (water/gas valves, and pull boxes) shown as:

Symbols representing the location within the setup

North arrow

Width of sidewalk cafe: 7

Length of sidewalk cafe: 26

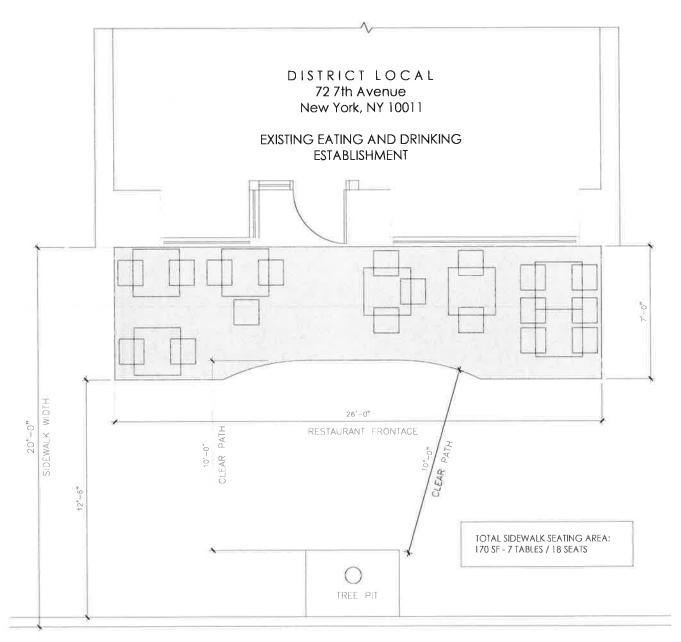

7th Avenue regional corridor

SIDEWALK CAFE PLAN

SCALE: 1/4"=1'-0"

 Please provide distances from the following objects. Only provide a distance if the listed object is within 15 feet of your proposed setup. Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding clearances. 					
Elements with minimum 15 feet clearance from sidewalk cafe:					
S01- Subway Stair: Open End	feet				
Elements with minimum 10 feet	clearance from si	dewalk cafe:			
S02- Subway Elevator Entrance	feet	S04- MTA Curb Cut	feet		
S03- Exhaust Duct	feet	S05- FDNY Curb Cut	feet		
Elements with minimum 8 feet o	learance from sid	ewalk cafe:			
S06- Street Tree Bed	10 feet	S13- Newsstand	feet		
S07- Mailbox	feet	514- Streetlight	feet		
S08- LinkNYC Kiosk	feet	S15- Bus Stop Pole	feet		
S09- Wayfinding Kiosk	feet	516- Fire Hydrant	feet		
510- E-charging Station	feet	S17- Bus Stop Shelter	feet		
S11- Parking Meter	feet	S18- Traffic Signal	feet		
S12- SBS Fare Machine	feet				
Elements with minimum 5 feet of	learance from sid	ewalk cafe:			
519- CitiBike/Bike Share Station	feet	S24- Emergency Exit Hatch	feet		
S20- Bike Corral	feet	S25- Subway Stair: Closed End	feet		
S21- Micromobility Station	feet	S26- Subway Elevator: Non-Entry	feet		
S22- Primary Building Entrance	feet	S27- Siamese Connection	feet		
S23- Curb Cut	feet				
Elements with minimum 3 feet o	learance from sid	ewalk cafe:			
S28- Elevated Train Infrastructure	feet	S29- Transformer Vault	feet		
Elements with minimum 1 foot 6 inches clearance from sidewalk cafe elements:					
S30- Vent Infrastructure: utility vent poles, vent grates, subway grates	inches	S31- Manholes	inches		
Check this box if none of the objects listed above are within 15 feet of the proposed setup.					
Cannot block access to building					

SECTION 2: Required Clearances

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your sidewalk cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements by checking the box next to the associated requirement. Refer to the Setup Guides in the Dining Out NYC website for more information regarding materials.

Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding materials.
Materials Checklist:
Required
Perimeter Demarcation (All of the following must be met)
Perimeter demarcation must be clear and visible by using a lightweight and removable self-supporting base wall, railing, planter, fence, or stanchion and rope. Maximum height is 2 feet 6 inches (excluding planting(s)).
Maximum neight is a reet o inches (excluding planting(s)). Not affixed to the sidewalk.
Optional- Only check the material categories you intend to use in your sidewalk cafe
 Eurnishings (if using, the first two below must be met) Lightweight and easily movable.
Not affixed to the sidewalk
Check here if you plan to place tables/chairs on top of a cellar or basement door. If so, please complete the <u>Cellar</u> or <u>Basement Door Certification</u>
Awnings Physically Attached to the Building (if using, all of the following must be met)
Minimum 8 feet helght from the ground and does not exceed 10 feet height.
Easily removable, comprised of fire-grade and wind resistant materials.
Does not extend beyond the perimeter of the sidewalk cafe,
Complies with the New York City Building Code. Please note that this may require additional permits from DOB, and/or approval from the Landmarks Preservation Commission (LPC) as applicable.
Overhead Coverings/ Umbrellas (if using, all of the following must be met)
Minimum 7 feet height from the ground and does not exceed 10 feet height.
Easily removable, comprised of fire-grade and wind resistant materials
Does not extend beyond the perimeter of the sidewalk cafe.
The umbrella/overhead covering has a weighted base and any supports are not affixed to the sidewalk
Any support structures are of sufficient size and strength, made of durable materials, and free of defects
Lighting and Electrical Connections (if using, all of the following must be met)
Any lighting is outdoor rated, properly secured, and lightweight
Connection is directly connected to ground floor restaurant's power source and within the perimeter of the cafe.
Does not extend beyond the perimeter of the sidewalk cafe.
Does not exceed 10 feet in height
Not attached to any City property, including street trees,
Electrical work complies with the applicable requirements set forth in DOT's rules and the New York City Electrical Code. Please note that this may require additional permits from DOB or FDNY, and/or approval from the Landmarks Preservation Commission (LPC) as applicable.

v		