



Mayor Ydanis Rodriguez Commissioner

Eric Adams

COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

Manhattan Community Board 4's (MCB4) recommendation is based on a vote at its January 6, 2025 Full Board Meeting with 39 members in favor of the recommendation, 1 member opposed, 0 members abstaining and 0 present but not eligible.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name: SHUKETTE

Cafe Location: 230 9TH AVE, NEW YORK, NY, 10001

Application Number: 20240719010012

CB Review Period: 30 days from receipt of application - due on business days

NYCDOT Internal Use Only

Roadway Cafe Setup Comments:				
Comments related to the cafe's physical footprint and dimensions:				
Comments related to pedestrian flow (i.e., visbility, safety, potential crowding):				
Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops);				
Overall recommendation for the cafe setup:				
Suggested modifications related to the above referenced application:				

Nelly Gonzalez Community Board Authorizing Name Whoregoles)

12/24/24

Date

RESTAURANT DETAILS

Restaurant Details

Food Service Establishment Permit(FSEP)

FSEP#: 50102347

Expiration Date: 01/31/2025 DOHMH Status: CURRENT

Business Legal Name: 230 NINTH AVENUE RESTAURANT LLC

Assumed Name: SHUKETTE

Business Address: 230 9TH AVE, NEW YORK, NY 10001

Venue Type: Restaurant (no bar)

Last updated from DOHMH: 11/21/2024

Restaurant Information

Entity Type: Limited Liability Corporation (LLC)

Phone: (646) 239-3439

Email Address: chrisp@bowerygroupnyc.com

Secondary Email Address: anna-marie@bowerygroupnyc.com

DOS Information DOS ID#: 5420341

Process Name: 230 NINTH AVENUE RESTAURANT LLC

DOS Address: 230 NINTH AVENUE, New York, New York 10001

NYS Liquor Authority Information NYSLA Serial No: 024021121801

License Type: On-Premises

Name of License: 230 NINTH AVENUE RESTAURANT LLC SHUKETTE

Title of Representative: CHAIR

Name of Certificate Holder: LILI M FAN

User Information

Created By: Chris Paraskevaides Created On: 7/18/2024 7:56:50 PM Modified By: Katrina Gustafson Modified On: 11/20/2024 5:31:22 PM

Business hours

Sun: 5:00 PM- 10:00 PM Mon: 5:00 PM- 11:00 PM Tues: 5:00 PM- 11:00 PM Wed: 5:00 PM- 11:00 PM Thurs: 5:00 PM- 11:00 PM Fri: 5:00 PM- 11:00 PM Sat: 5:00 PM- 11:00 PM












SECTION 1: Site Plan

- This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application.
- Refer to the How to Apply page in the Dining Out NYC website for more information about the application process

Length of roadway cafe: 31'-5"

Identify Permitted Parking Location:

- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
- 1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking.

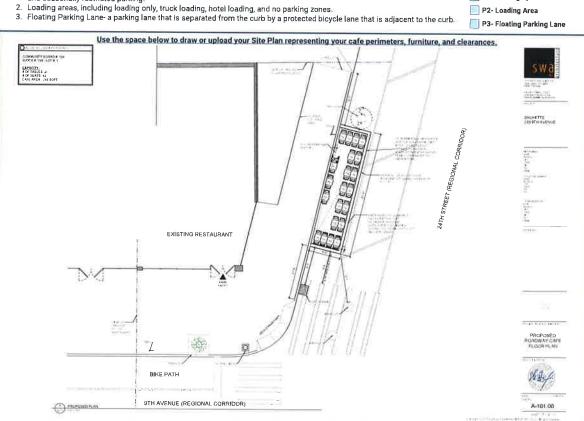

feet

Width of roadway cafe: 8'-0"



Roadway Cafe Site Plan Form

Applicant Name:

Chris Paraskevaides

Restaurant Name

Shukette

FSEP Number:

P1- Parking Space

50102347

Drawing Requirements

Food service establishment frontage shown by:

- Line representing space occupied in building
- Labels
- Length

Street names:

Labels on each street

Sidewalk shown as:

- Line representing street curb Width measured from building line to

Roadway shown as:

- Lines indicating parking lane
- Width of parking lane

Cafe perimeter shown as:

- Lines indicating perimeter
- Length and width of all three sides

Set-up furniture (tables, chairs, etc.) shown as:

Lines or symbols at approximate location within setup

Elements or objects shown as:

- Lines or symbols
- Labels
- Distance from cafe perimeter

Utility coverings shown as:

Symbols representing the approximate shape of the covering within the setup

☑ UTILITY COVERING

SECTION 2: Required Cleara	псеѕ			
 Please provide distances from the following objects. Only provide a distance if the listed object is within 15 feet of your proposed setup. Leave box blank if not applicable. Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding clearances. 				
Elements with minimum 15 feet clearance from roadway cafe:				
R01- Subway Stair: Open End	feet			
Elements with minimum 10 feet clearance from roadway cafe:				
R03- Subway Elevator Entrance R04- FDNY Curb Cut R05- MTA Curb Cut	feet feet			
Elements with minimum 5 feet clearance from roadway cafe:				
R06- Curb Cut R07- Emergency Exit Hatch R08- Subway Stair; Closed End R09- Subway Elevator; Non-Entry R10- Bus Stop Pole; Non- Approaching Side Elements with minimum 3 feet cl. R15- Elevated Train Infrastructure R16- Transformer Vault Elements with minimum 1 foor ar	feet earance from re feet feet		feet feet feet feet feet feet feet	
Elements with minimum 6 inches clearance from roadway cafe:				
R18- Thermoplastic Marking	7feet			
Roadway cafe distance from crosswalks:				
R19- Adjacent to non-approaching side of crosswalk (min. 8 foot distance) R20- Adjacent to approaching (stopping) side of crosswalk (min. 20 foot distance)	8feet	crosswalk on from	tance required in crosswalk on proaching side	
R21- No crosswalk present (maintain 20 feet from		65	200	

curb line of intersecting

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
- Refer to the Setup Guides in the Dining Out NYC website for more information regarding materials.

Materials Checklist:

Required **Barriers**

- Maintained on all sides of the cafe except the side fronting the ground floor restaurant.
- Not permanently affixed to the roadway.
- 30-42 inches tall (excluding planting), and at least 4 inches in width
- Barriers are interconnected with each other.
- Any cladding over the barriers is securely fastened or affixed.
- Minimum 4 inches wide reflective strip on each barrier on the outward facing side.
- Water-filled with a minimum of 150 pounds per linear foot of barrier length.
- If your proposed barriers will utilize fill materials other than water please check this box. This may require additional information from the applicant and further review by the Dining Out NYC team, as well as supporting DOT units and City agencies.

Optional- Only check the material categories you intend to use in your roadway cafe

Flooring

- Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning.
- Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and compliant with applicable accessibility requirements.
- Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage.

Furnishings

Lightweight and easily movable.

Vertical Screenings

- Located between the barrier and 6 feet above the cafe base or floor.
- Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers.
- Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.
- If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

Overhead Coverings/ Umbrellas

- Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe.
- Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are of sufficient size and strength, made of durable materials, and free of defects.
- Easily removable, comprised of fire-grade and wind resistant materials.
- If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

Lighting and Electrical Connections

- Any lighting is outdoor rated, properly secured, and lightweight.
 At least 14 feet above sidewalk, and 18 feet above roadway.
- Not attached to any City property, including street trees.
- Electrical work complies with the applicable requirements set forth in the DOT's rules and the New York City Electrical Code
- Please check this box if you are submitting additional documents for review. Documents may include technical drawings prepared by a licensed professional.