



Eric Adams Mayor Ydanis Rodriguez Commissioner

COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

Manhattan Community Board 4's (MCB4) recommendation is based on a vote at its January 6, 2025 Full Board Meeting with 39 members in favor of the recommendation, 1 member opposed, 0 members abstaining and 0 present but not eligible.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name: Ama La Vita

Cafe Location: 121 W 19TH ST, NEW YORK, NY, 10011

Application Number: 20240718010035

CB Feedback Deadline (on date or next business day): 01-08-2025

NYCDOT Internal Use Only

Roadway Cafe Setup Comments:		
Comments related to the cafe's physical footp	orint and dimensions:	
Comments related to pedestrian flow (i.e., visb	oility, safety , potential crowding):	
Comments related to potential conflicts with e	existing curb use (i.e., planters, bike ra	ncks, bus stops)
Overall recommendation for the cafe setup:		
Suggested modifications related to the above	referenced application:	
Nelly Gonzalez Community Board Authorizing Name	Mongalez	1/8/25

Date

Manhattan Community Board 4's (MCB4) recommendation is based on a vote at its January 6, 2025 Full Board Meeting with 39 members in favor of the recommendation, 1 member opposed, 0 members abstaining and 0 present but not eligible.

RESTAURANT DETAILS

Food Service Establishment Permit(FSEP)

FSEP#: 50154934

Expiration Date: 07/07/2024

DOHMH Status: PENDING APPLICATION Business Legal Name: AMA LA VITA LLC

Assumed Name: N/A

Business Address: 121 W 19TH ST, NEW YORK, NY 10011

Venue Type: Restaurant (no bar)

Last updated from DOHMH: 12/09/2024

Restaurant Information

Entity Type: Limited Liability Corporation (LLC)

Phone: (917) 531-7991

Email Address: asidosolutions@gmail.com

Secondary Email Address: CHABAD10@gmail.com

DOS Information DOS ID#: 7363892

Process Name: JOSEPH ASIDO

DOS Address: 510 east 23rd street, new york, New York 10010

NYS Liquor Authority Information Establishment serves alcohol: No

User Information


Created By: Joseph Asido

Created On: 7/18/2024 5:36:53 AM Modified By: JOSEPH ASIDO Modified On: 7/18/2024 6:31:23 PM

Business hours

Sun: 8:00 AM- 9:00 PM Mon: 8:00 AM- 9:00 PM Tues: 8:00 AM- 9:00 PM Wed: 8:00 AM- 9:00 PM Thurs: 8:00 AM- 9:00 PM Fri: 8:00 AM- 3:00 PM

Sat: -

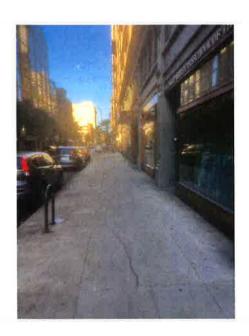









1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking. 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones. P1- Parking Space P2- Loading Area 3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb P3- Floating Parking Lane Use the space below to draw or upload your Site Plan representing your cafe perimeters, furniture, and clearances. Length of roadway cafe: 10 Width of roadway cafe:

SECTION 1: Site Plan

Identify Permitted Parking Location:

Roadway cafes can only be placed in:

This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application. Refer to the How to Apply page in the Dining Out NYC website for more information about the application process.

Identify the Parking Sign in front of or around the area where your roadway setup would be located,



Site Plan Form

Applicant Name:

JOSEPH ASIDO

Restaurant Name:

AMA LA VITA

50154934

FSEP Number:

Drawing Requirements

Food service establishment frontage

- Line representing the establishment's space facing the sidewalk
- Length
- Label

Street names:

Labels on each street

Sidewalk shown as:

· Line representing street curb

Roadway shown as:

Width of curbside lane

Cafe perimeter shown as:

Lines indicating perimeter

Length and width

Set-up furniture (tables, chairs, etc.) shown as: · Lines or symbols at approximate

location within setup


Elements (in Section 2 of this form) within 15 feet of cafe perimeter, shown

- · Lines or symbols
- Distance from cafe perimeter
- Labels

Utility coverings (water/gas valves, and pull boxes) shown as:

Symbols representing the location within the setup

North arrow

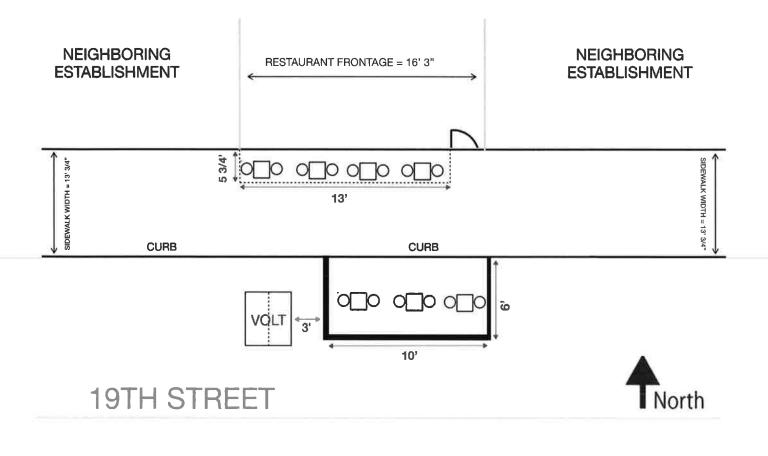

	s			SECTION 3: Material Requirements
Please provide distances from the Only provide a distance if the listed Refer to the Setup Guides in the Di	d object is wi	ithin 15 feet of your proposed setu		Please Indicate which of the following to the category, If applicable, please or Refer to the <u>Setup Guides</u> in the Dining
Elements with minimum 15 feet clear	rance from r	oadway cafe:		Materials Checklist:
R01- Subway Stair: Open End	feet	R02- Fire Hydrant	feet	
Elements with minimum 10 feet clear	rance from r	oadway cafe:		Barriers (All of the following must be
R03- Subway Elevator Entrance	feet	R05- MTA Curb Cut	feet	Maintained on all sides of the cafe
R04- FDNY Curb Cut	feet	INDS- WITA COLD COL		Not permanently affixed to the roa 30-42 inches tall (excluding planting
Elements with minimum 5 feet clears	anno from ro	adway onfor		Barriers are interconnected with ea
	ance from ro			Any cladding over the barriers is se
R06- Curb Cut	feet	R11- CitiBike/Bike Share Station	feet	Minimum 4 inches wide reflective
R07- Emergency Exit Hatch	feet	R12- Bike Corral	feet	Water-filled with a minimum of 15
R08- Subway Stair: Closed End	feet	R13- Micromobility Station	feet	*Optional - Only check the mater
R09- Subway Elevator: Non-Entry	feet	R14- Drainage Infrastructure	feet	Optional only check the mater
R10- Bus Stop Pole:				Flooring (if using, all of the following
Non- Approaching Side	feet			Durable, lightweight, easily remov drainage, and removable to allow
Elements with minimum 3 feet cleara	ance from ro	adway cafe:		Flush with the curb line (except if I
R15- Elevated Train Infrastructure	feet	R16- Transformer Vault	3 feet	compliant with applicable accessit
		ARREST		Maintains a 6 inch covered channe
elements with minimum 1 foor and 6	inches clea	rance from roadway cafe:		Furnishings (if using, all of the follo
R17- Vent Infrastructure:	feet	rance from roadway cafe: R18- Manholes	inches	Lightweight and easily movable
		_	inches	Lightweight and easily movable. Vertical Screenings (if using, all of
R17-Vent Infrastructure: utility vent poles, vent grates, subway grates	feet	R18- Manholes	inches	Lightweight and easily movable. Vertical Screenings (if using, all of Located between the barrier and 6
R17-Vent Infrastructure: utility vent poles, vent grates, subway grates Elements with minimum 6 Inches cle:	feet arance from	R18- Manholes	inches	Lightweight and easily movable. Vertical Screenings (if using, all of
R17-Vent Infrastructure: utility vent poles, vent grates, subway grates	feet	R18- Manholes	inches	Vertical Screenings (if using, all of Located between the barrier and 6 Located on the roadway facing sid
R17-Vent Infrastructure: utility vent poles, vent grates, subway grates Elements with minimum 6 Inches clea	feet arance from feet	R18- Manholes	inches	Vertical Screenings (if using, all of Located between the barrier and & Located on the roadway facing sid is not affixed to the outward facing
R17-Vent Infrastructure: utility vent poles, vent grates, subway grates Elements with minimum 6 Inches cles R19-Thermoplastic Marking	feet arance from feet	R18- Manholes	inches	Vertical Screenings (if using, all of Userical Screenings (if using, all of Located between the barrier and 6 Located on the roadway facing sid is not affixed to the outward facing.
R17- Vent Infrastructure: utility vent poles, vent grates, subway grates Elements with minimum 6 Inches cle: R19- Thermoplastic Marking Roadway cafe distance from crosswa	feet arance from feet	R18- Manholes	inches	Vertical Screenings (if using, all of Vertical Screenings (if using, all of Located between the barrier and 6 Located on the roadway facing sid is not affixed to the outward facing Easily removable, comprised of no If within 50 feet of any regulatory Overhead Coverings/ Umbrellas (if
R17-Vent Infrastructure: utility vent poles, vent grates, subway grates Elements with minimum 6 Inches cles R19- Thermoplastic Marking	feet arance from feet	R18- Manholes		Lightweight and easily movable. Vertical Screenings (if using, all of Located between the barrier and 6 Located on the roadway facing sid is not affixed to the outward facing Easily removable, comprised of no If within 50 feet of any regulatory Overhead Coverings/ Umbrellas (if Minimum of 7 feet and maximum Has a weighted base and any supp
R17-Vent Infrastructure: utility vent poles, vent grates, subway grates Elements with minimum 6 Inches clea R19- Thermoplastic Marking Roadway cafe distance from crosswa R20- Adjacent to non-approaching side of	feet arance from feet	R18- Manholes roadway cafe: Distance required from crosswalk on fr	istance required om crosswalk on	Lightweight and easily movable. Vertical Screenings (if using, all of Located between the barrier and 6 Located on the roadway facing sid is not affixed to the outward facing Easily removable, comprised of no If within 50 feet of any regulatory Overhead Coverings/ Umbrellas (if Minimum of 7 feet and maximum Has a weighted base and any supp of sufficient size and strength, made
R17-Vent Infrastructure: utility vent poles, vent grates, subway grates Elements with minimum 6 Inches cle: R19- Thermoplastic Marking Roadway cafe distance from crosswa R20- Adjacent to non-approaching side of crosswalk (min. 8 foot distance)	feet arance from feet liks:	R18- Manholes roadway cafe: Distance required from crosswalk on fr	istance required	Vertical Screenings (if using, all of Located between the barrier and 6 Located on the roadway facing sid is not affixed to the outward facing Easily removable, comprised of no If within 50 feet of any regulatory Overhead Coverings/ Umbrellas (if Minimum of 7 feet and maximum Has a weighted base and any supp of sufficient size and strength, mad Easily removable, comprised of fire
R17-Vent Infrastructure: utility vent poles, vent grates, subway grates Elements with minimum 6 Inches cle: R19- Thermoplastic Marking Roadway cafe distance from crosswa R20- Adjacent to non-approaching side of crosswalk (min. 8 foot distance) R21- Adjacent to approaching (stopping)	feet arance from feet liks:	R18- Manholes roadway cafe: Distance required from crosswalk on fr	istance required om crosswalk on	Lightweight and easily movable. Vertical Screenings (if using, all of Located between the barrier and 6 Located on the roadway facing sid is not affixed to the outward facing. Easily removable, comprised of no If within 50 feet of any regulatory Overhead Coverings/ Umbrellas (if Minimum of 7 feet and maximum. Has a weighted base and any supp of sufficient size and strength, mad Easily removable, comprised of fire If within 50 feet of any regulatory
R17-Vent Infrastructure: utility vent poles, vent grates, subway grates Elements with minimum 6 Inches cle: R19-Thermoplastic Marking Roadway cafe distance from crosswa R20-Adjacent to non-approaching side of crosswalk (min. 8 foot distance) R21-Adjacent to approaching (stopping) side of crosswalk	feet arance from feet alks: feet	R18- Manholes roadway cafe: Distance required from crosswalk on fr	istance required om crosswalk on	Vertical Screenings (if using, all of Located between the barrier and 6 Located on the roadway facing sid is not affixed to the outward facing Easily removable, comprised of no If within 50 feet of any regulatory Overhead Coverings/ Umbrellas (if Minimum of 7 feet and maximum Has a weighted base and any supp of sufficient size and strength, mad Easily removable, comprised of fire If within 50 feet of any regulatory Lighting and Electrical Connections
R17- Vent Infrastructure: utility vent poles, vent grates, subway grates Elements with minimum 6 Inches cle: R19- Thermoplastic Marking R0adway cafe distance from crosswa R20- Adjacent to non-approaching side of crosswalk (min. 8 foot distance) R21- Adjacent to approaching (stopping) side of crosswalk (min, 20 foot distance)	feet arance from feet liks:	R18- Manholes roadway cafe: Distance required from crosswalk on fr	istance required om crosswalk on	Lightweight and easily movable. Vertical Screenings (if using, all of Located between the barrier and 6 Located on the roadway facing sid is not affixed to the outward facing. Easily removable, comprised of no If within 50 feet of any regulatory Overhead Coverings/ Umbrellas (if Minimum of 7 feet and maximum. Has a weighted base and any supp of sufficient size and strength, mad Easily removable, comprised of fire If within 50 feet of any regulatory
R17-Vent Infrastructure: utility vent poles, vent grates, subway grates Elements with minimum 6 Inches cle: R19- Thermoplastic Marking Roadway cafe distance from crosswa R20- Adjacent to non-approaching side of crosswalk (min. 8 foot distance) R21- Adjacent to approaching (stopping) side of crosswalk (min. 20 foot distance) R22- No crosswalk present	feet arance from feet alks: feet	R18- Manholes roadway cafe: Distance required from crosswalk on fr	istance required om crosswalk on	Vertical Screenings (if using, all of Located between the barrier and 6 Located on the roadway facing sid is not affixed to the outward facing Easily removable, comprised of no If within 50 feet of any regulatory Overhead Coverings/ Umbrellas (if Minimum of 7 feet and maximum Has a weighted base and any supp of sufficient size and strength, mad Easily removable, comprised of fire If within 50 feet of any regulatory Lighting and Electrical Connections Any lighting is outdoor rated, prop At least 14 feet above sidewalk, an Not attached to any City property,
utility vent poles, vent grates, subway grates grates, subway grates Elements with minimum 6 Inches cless R19- Thermoplastic Marking R20- Adjacent to non-approaching side of crosswalk (min. 8 foot distance) R21- Adjacent to approaching (stopping) side of crosswalk (min. 20 foot distance)	feet arance from feet alks: feet	R18- Manholes roadway cafe: Distance required from crosswalk on non-approaching side	istance required om crosswalk on	Vertical Screenings (if using, all of Located between the barrier and 6 Located on the roadway facing sid is not affixed to the outward facing Easily removable, comprised of no If within 50 feet of any regulatory Overhead Coverings/ Umbrellas (if. Minimum of 7 feet and maximum. Has a weighted base and any suppor sufficient size and strength, max Easily removable, comprised of fire If within 50 feet of any regulatory Lighting and Electrical Connections Any lighting is outdoor rated, prop At least 14 feet above sidewalk, an

e following materials will be part of your roadway cafe by checking the box next le, please confirm the materials comply with the Dining Out NYC requirements. n the Dining Out NYC website for more information regarding materials. *Required* wing must be met) es of the cafe except the side fronting the ground floor restaurant. xed to the roadway. luding planting), and at least 4 inches in width. ected with each other. barriers is securely fastened or affixed de reflective strip on each barrier on the outward facing side. inimum of 150 pounds per linear foot of barrier length the material categories you intend to use in your roadway cafe* the following must be met) easily removable, mold-resistant, elevated from the ground level to allow for able to allow for cleaning. ne (except if located on a slope, be flush to the greatest extent feasible), and cable accessibility requirements. vered channel between curb and base of flooring to allow for drainage. of the following must be met) ily movable sing, all of the following must be met) barrier and 6 feet above the cafe base or floor. vay facing side, does not extend the beyond the perimeter of the roadway cafe, and utward facing side of barriers nprised of non-opaque, fire-grade, and wind resistant materials. ny regulatory or warning signs, does not exceed 46 inches in height. nbrellas (if using, all of the following must be met) nd maximum of 10 feet from the base or floor of the roadway cafe... and any support structures are not affixed to the outward facing side of barriers, are strength, made of durable materials, and free of defects nprised of fire-grade and wind resistant materials. ny regulatory or warning signs, does not exceed 46 inches in height. onnections (if using, all of the following must be met) or rated, properly secured, and lightweight. sidewalk, and 18 feet above roadway. ity property, including street trees ies with the applicable requirements set forth in DOT's rules and the New York City e note that this may require additional permits from DOB or FDNY, and/or approval from the on Commission (LPC) as applicable