



Eric Adams Mayor Ydanis Rodriguez Commissioner

COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

Manhattan Community Board 4's (MCB4) recommendation is based on a voted at its April 2, 2025 Full Board Meeting with 43 members in favor of the recommendation, 1 member opposed, 0 members abstaining and 0 present but not eligible.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

Date

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name: DA UMBERTO RESTAURANT

Cafe Location: 107 WEST 17 STREET, NEW YORK, NY, 10011

Application Number: 20240803010180

Community Board Authorizing Name

CB Feedback Deadline (on date or next business day): 03-12-2025

NYCDOT Internal Use Only

Roadway Cafe Setup Comments:
Comments related to the cafe's physical footprint and dimensions :
Comments related to pedestrian flow (i.e., visbility, safety , potential crowding):
Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops):
Overall recommendation for the cafe setup:
MCB4 recommends approval
Suggested modifications related to the above referenced application:
Nelly Gonzalez Manualez 3/12/25

On 3/11/25 the Business Licenses & Permits Committee voted to recommend approval. This application is subject to ratification by MCB4 Full Board on Wednesday, April 2, 2025.

RESTAURANT DETAILS

Food Service Establishment Permit(FSEP)

FSEP#: 40387162

Expiration Date: 06/30/2025 DOHMH Status: CURRENT

Business Legal Name: DA UMBERTO RESTAURANT, INC.

Assumed Name: DA UMBERTO RESTAURANT

Business Address: 107 WEST 17 STREET, NEW YORK, NY 10011

Venue Type: Restaurant (with bar)

Last updated from DOHMH: 02/06/2025

Restaurant Information Entity Type: Corporation Phone: (212) 989-0303

Email Address: vassante@daumbertonyc.com Secondary Email Address: vassante@gmail.com

DOS Information DOS ID#: 1165780

Process Name: Da Umberto Restaurant Inc

DOS Address: 107 W 17, New York, New York 10011

NYS Liquor Authority Information NYSLA Serial No: 034021116921

License Type: On-Premises

Name of License: Victor Assante Title of Representative: President

Name of Certificate Holder: Da Umberto Restaurant inc

User Information

Created By: victor assante

Created On: 8/3/2024 9:20:08 PM

Modified By: victor assante

Modified On: 8/3/2024 9:20:08 PM

Business hours

Sun:12:00 PM- 11:00 PM Mon:12:00 PM- 11:00 PM Tues:12:00 PM- 11:00 PM Wed:12:00 PM- 11:00 PM Thurs:12:00 PM- 11:00 PM Fri:12:00 PM- 11:00 PM Sat:12:00 PM- 11:00 PM












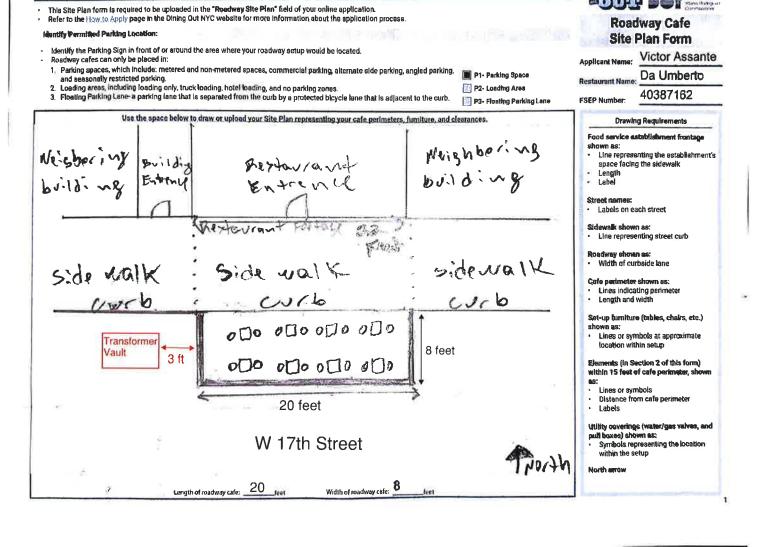

SECTION 2: Required Clearance	ces		1 SQ 11 L	SECTION 3: Material Requirements
Please provide distances from the following objects. Only provide a distance if the listed object is within 15 feet of your proposed setup. Refer to the Setup_Guides in the Dining Out NYC website for more information, regarding clearances.				Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements. Refer to the Setup, Guides in the Dining Out NYC website for more information regarding materials.
Elements with minimum 15 feet clearance from roadway cafe:				Materials Checklist:
R01 - Subway Stali: Open End	feet	R02- Fire Hydrant	feet	*Required*
Elements with minimum 10 feet cl	earance from re	padway cafe:		Barriers (All of the following must be met)
R03- Subway Elevator Entrance	feet	R05- MTA Curb Cut	feet	Maintained on all sides of the cafe except the side fronting the ground floor restaurant.
R04- FDNY Curb Cut	feet		ieet	Mot permanently affixed to the roadway. \$\overline{\over
_				Barriers are interconnected with each other.
Elements with minimum 5 feet clearance from roadway calle:				Any cladding over the barriers is securely fastened or affixed
R06- Curb Cut	feet	R11- CitiBlke/Bike Share Station	feet	Minimum 4 inches wide reflective strip on each barrier on the outward facing side.
R07- Emergency Exit Hatch	feet	R12- Bike Corral	feet	Water-filled with a minimum of 150 pounds per linear foot of barrier length.
R08- Subway Stair: Closed End	feet	R13- Micromobility Station	feet	*Optional - Only check the material categories you intend to use in your roadway cafe*
R09- Subway Elevator: Non-Entry	feet	R14- Drainage Infrastructure	feet	Optional - Only check the material categories you likely to use in your loadway care:
R10-Bus Stop Pole:				Flooring (if using, all of the following must be met)
Non- Approaching Side	feet			Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning.
Elements with minimum 3 feet clearance from roadway calle:			113	Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and
R15- Elevated Train Infrastructure	feet	R16- Transformer Vault	feet	compliant with applicable accessibility requirements. Majntains a 6 inch covered channel between curb and base of flooring to allow for drainage.
Elements with minimum 1 foor an	d 6 Inches clear	rance from roadway cafe:		Furnishings (if using, all of the following must be met)
R17-Vent Infrastructure:	feet	R18- Manholesin	Inches	Lightweight and easily movable.
utility vent poles, vent		I I I I I I I I I I I I I I I I I I I		Vertical Screenings (if using, all of the following must be met)
grates, subway grates				Located between the barrier and 6 feet above the cafe base or floor.
Elements with minimum 6 inches clearance from roadway cafe:				Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers.
R19-Thermoplastic Marking	feet			Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.
Roadway cafe distance from cross	ewalks:			If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.
				Overhead Coverings/ Umbrellas (if using, all of the following must be met)
R20- Adjacent to	- [Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe.
non-approaching side of crosswalk	- 1	Distance required from	sce required	Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are
(mis. 8 foot distance)	feet	crosswalk on from c	rosswalk on	of sufficient size and strength, made of durable materials, and free of defects. Easily removable, comprised of fire-grade and wind resistant materials.
R21-Adjacent to		non-approaching skie appro	aching side	If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.
approaching (stopping)	- 1	Name		Lighting and Electrical Connections (if using, all of the following must be met)
side of crosswalk	feet	NI	data the	Any lighting is outdoor rated, properly secured, and lightweight.
(min, 20 foot distance)	reet	建 性在2022		At least 14 feet above sidewalk, and 18 feet above roadway.
R22- No crosswalk present (maintain 20 feet from curb line of intersecting street)	- 1	6	2000	Not attached to any City property, including street trees.
	feet			Electrical work compiles with the applicable requirements set forth in DOT's rules and the New York City Electrical Code. Please note that this may require additional permits from DOB or FDNY, and/or approval from the Landmarks Preservation Commission (LPC) as applicable.
		are within 15 feet of the proposed setup.		