



Eric Adams
Mayor

Ydanis Rodriguez
Commissioner

COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

Manhattan Community Board 4's (MCB4) recommendation is based on a voted at its March 5, 2025 Full Board Meeting with 42 members in favor of the recommendation, 1 member opposed, 0 members abstaining and 0 present but not eligible.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name: LE RIVAGE

Cafe Location: 340 WEST 46 STREET, NEW YORK, NY, 10036

Application Number: 20240725010021

CB Feedback Deadline (on date or next business day): 03-05-2025

NYCDOT Internal Use Only

Roadway Cafe Setup Comments:
Comments related to the cafe's physical footprint and dimensions :
Comments related to pedestrian flow (i.e., visbility, safety , potential crowding):
Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops):
Overall recommendation for the cafe setup: MCB4 recommends approval
Suggested modifications related to the above referenced application:

Nelly Gonzalez

Community Board Authorizing Name

2/28/25

Date

On 2/11/25 the Business Licenses & Permits Committee voted to recommend approval. This application is subject to ratification by MCB4 Full Board on Wednesday, March 5, 2025.

Mongolez)

RESTAURANT DETAILS

Food Service Establishment Permit(FSEP)

FSEP#: 40600780

Expiration Date: 11/30/2025 DOHMH Status: CURRENT

Business Legal Name: 340 WEST 46TH STREET CORP

Assumed Name: LE RIVAGE

Business Address: 340 WEST 46 STREET, NEW YORK, NY 10036

Venue Type: Restaurant (no bar)

Last updated from DOHMH: 01/29/2025

Restaurant Information Entity Type: Corporation Phone: (212) 765-7374

Email Address: info@lerivagenyc.com

Secondary Email Address: chefpaul@lerivagenyc.com

DOS Information
DOS ID#: 13395688

Process Name: 340 west 46th street corp

DOS Address: 340 West 46th street, New York, New York 10036

NYS Liquor Authority Information

NYSLA Serial No: 1028014 License Type: On-Premises

Name of License: 340 west 46th Street corp

Title of Representative: Owner

Name of Certificate Holder: Paul Denamiel

User Information


Created By: Paul Denamiel

Created On: 7/18/2024 2:16:12 PM Modified By: Katrina Gustafson Modified On: 1/29/2025 9:41:25 AM

Business hours

Sun:11:30 AM- 11:00 PM
Mon:11:30 AM- 11:00 PM
Tues:11:30 AM- 11:00 PM
Wed:11:30 AM- 11:00 PM
Thurs:11:30 AM- 11:00 PM
Fri:11:30 AM- 12:00 AM
Sat:11:30 AM- 12:00 AM



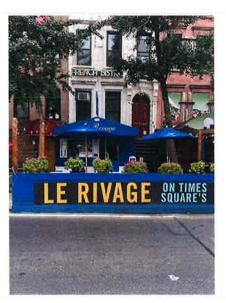









- This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application.

 Refer to the <u>How to Apoly</u> page in the Dining Out NYC website for more information about the application process

Identify Permitted Parking Location:

- Identify the Parking Sign in front of or around the area where your roadway setup would be located Roadway cafes can only be placed in:
- 1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate aide parking, angled parking. and seasonally restricted parking
- Loading areas including loading only, truck loading, hotel loading, and no parking zones.
 Floating Parking Lane- a parking lene that is separated from the curb by a protected bicycle lane that is adjacent to the curb.

P2- Loading Area

P3- Floating Parking Lane

Roadway Cafe Site Plan Form 340 West 48th Street Corp

2011 567

La Rivage Restaurant Name:

FSEP Number:

40600780

Drawing Requirements

Food service establishment frontage

- own as:
 Line representing the establishment's space facing the sidewalk

Street names:
- Labels on each street

Sidewalk shown as: Line representing street curb

Roadway shown as:
- Width of curbside lane

- Cafe perimeter shown as:
 Lines indicating perimeter
- Length and width

Set-up furniture (tables, chairs, etc.)


shown as:
Lines or symbols at approximate location within setup

Elements (In Section 2 of this form) within 15 feet of cafe perimeter, shown

- Lines or symbols
- Distance from cafe perimeter Labels

Utility coveringe (water/gas valves, and pull boxes) shown se: Symbols representing the location

within the setup

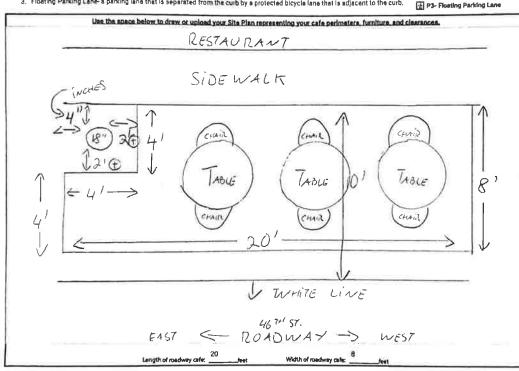

	es	Alexander and the same	
	ed object is wi	ojects thin 15 feet of your proposed setup C website for more information regarding	g clearances,
Elements with minimum 15 feet cla	arance from r	oedway cafe:	
R01- Subway Stair: Open End	feet	R02- Fire Hydrant	feet
Elements with minimum 10 feet cle	arance from r	roadway cafa:	
R03- Subway Elevator Entrance	feet	ROS- MTA Curb Cul	feet
R04- FDNY Curb Cut	feet	_	
Elements with minimum 5 feet clear	rance from ro	edway cafe:	
R06- Curb Cut	feet	R11- CitiBlke/Blke Share Station	feet
R07- Emergency Exit Hatch	feet	R12- Bike Corral	feet
ROB- Subway Stair: Closed End	feet	R13- Micromobility Station	feet
R09- Subway Elevator: Non-Entry	feet	R14- Drainage infrastructure	feet
R10- Bus Stop Pole:			
Non- Approaching Side	feet		
Elements with minimum 3 feet clea	rance from ro	adway cafe:	
_		_	
R15- Elevated Train infrastructure	feet	R16- Transformer Vault	feet
R15- Elevated Train infrastructure Elements with minimum 1 foor and			feet
Elements with minimum 1 foor and R17- Vent infrastructure: utility vent poles, vent	6 Inches clea	erance from roadway cafe:	feet
Elements with minimum 1 foor and R17- Vent infrastructure: utility vent poles, vent grates, subway grates	6 Inches clea	erance from roadway cafe:	
Elements with minimum 1 foor and R17- Vent infrastructure: uility vent poles, vent grates, subway grates Elements with minimum 6 inches of	6 Inches clea	erance from roadway cafe:	
Elements with minimum 1 foor and R17- Vent infrastructure: utility vent poles, vent grates, subway grates Elements with minimum 6 inches of R19- Thermoplastic Marking Roadway cafe distance from crossv R20- Adjacent to non-approaching side of crosswalk (min. 8 foot distance)	6 Inches clea	Pristance required from crosswalk on from the crosswalk on from the crosswalk on from the crosswalk on the c	
Elements with minimum 1 foor and R17- Vent infrastructure: uility vent poles, vent grates, subway grates Elements with minimum 6 inches of R19- Thermopiastic Marking Roadway cafe distance from crossv R20- Adjacent to non-approaching side of crosswalk	feet feet feet feet feet feet feet feet	Pristance required from crosswalk on from from crosswalk on from from from crosswalk on from from from crosswalk on the cro	24 Inche

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next
- to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements. Refer to the Setup Guides in the Dining Out NYC website for more information regarding materials.

Materiala Checklist:

Required

- Barriers (All of the following must be met) Maintained on all sides of the cafe except the side fronting the ground floor restaurant.
 - Not permanently affixed to the roadway.
 - 30-42 Inches tall (excluding planting), and at least 4 inches in Width.
 - Barriers are interconnected with each other.
 - Any cladding over the barriers is securely fastened or affixed.
 - Minimum 4 inches wide reflective strip on each barrier on the outward facing side.
 - Water-filled with a minimum of 150 pounds per linear foot of barrier length.

Optional - Only check the material categories you intend to use in your roadway cafe.

Elegring (if using, all of the following must be met)

- Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning.
- Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and compliant with applicable accessibility requirements
- Maintains a 6 Inch covered channel between curb and base of flooring to allow for drainage.

Fumishings (if using, all of the following must be met)

III Lightweight and easily movable.

Vertical Screenings (if using, all of the following must be met)

- Located between the barrier and 6 feet above the cafe base or floor.
- Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers.
- This drivers to the outwern recting after or being a property of the prop

Overhead Coverings/ Umbreiles (if using all of the following must be met)

- Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe.
- Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are of sufficient size and strength, made of durable materials, and free of defects.
- Easily removable, comprised of fire-grade and wind resistant materials. 📗 If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

Lighting and Electrical Connections (if using, all of the following must be met)

- Any lighting is outdoorrated, properly secured, and lightweight.
- At least 14 feet above sidewalk, and 18 feet above roadway.
- Mot attached to any City property, including street trees.

 Flectrical work compiles with the applicable requirements set forth in DOT's rules and the New York City Electrical Code. Please note that this may require additional permits from DOB or FDNY, and for approval from the Landmarks Preservation Commission (LPC) as applicable.