



Eric Adams
Mayor
Ydanis Rodriguez
Commissioner

COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name: 10TH AVENUE COOKSHOP

Cafe Location: 156 10 AVENUE, NEW YORK, NY, 10011

Application Number: 20240724010028

CB Feedback Deadline (on date or next business day): 03-05-2025

NYCDOT Internal Use Only

Roadway Cafe Setup Comments:

Comments related to the cafe's **physical footprint and dimensions**:
The number of tables and chairs on the proposed Site Plan (26 tables with 2 chairs each) cannot fit in the proposed footprint of the roadway cafe. Applicant has agreed to remove 6 tables with 2 chairs each from the side of the cafe nearest the curb, reducing the cafe to 18 tables 36 seats + 2 ADA seating.

Comments related to **pedestrian flow** (i.e., visibility, safety, potential crowding):

Comments related to potential conflicts with **existing curb use** (i.e., planters, bike racks, bus stops):

Overall recommendation for the cafe setup:
To fit within the proposed footprint of the roadway cafe, MCB4 requests modifications to the cafe. Applicant has agreed to these modifications and has removed 6 tables with 2 chairs each. A Revised Site Plan, reducing the cafe to 18 tables 36 seats + 2 ADA seatings -- to which applicant has agreed -- is attached.

Suggested modifications related to the above referenced application:

To fit within the proposed footprint of the roadway cafe, MCB4 requests modifications to the cafe. Applicant has agreed to these modifications and has removed 6 tables with 2 chairs each. A Revised Site Plan, reducing the cafe to 18 tables 36 seats + 2 ADA seatings -- to which applicant has agreed -- is attached.

Nelly Gonzalez

Community Board Authorizing Name



2/28/25

Date

RESTAURANT DETAILS

Food Service Establishment Permit(FSEP)

FSEP#: 41092609

Expiration Date: 03/31/2026

DOHMH Status: CURRENT

Business Legal Name: 156 TENTH AVENUE RESTAURANT LLC

Assumed Name: 10TH AVENUE COOKSHOP

Business Address: 156 10 AVENUE, NEW YORK, NY 10011

Venue Type: Restaurant (with bar)

Last updated from DOHMH: 01/29/2025

Restaurant Information

Entity Type: Limited Liability Corporation (LLC)

Phone: (646) 239-3439

Email Address: chrisp@bowerygroupnyc.com

Secondary Email Address: anna-marie@bowerygroupnyc.com

DOS Information

DOS ID#: 3073481

Process Name: 156 Tenth Avenue Restaurant LLC

DOS Address: 156 Tenth Avenue, new york, New York 10011

NYS Liquor Authority Information

NYSLA Serial No: 1164847

License Type: On-Premises

Name of License: 156 tenth Avenue Restaurant LLC

Title of Representative: Chair

Name of Certificate Holder: Lily M fan

User Information

Created By: Chris Paraskevaides

Created On: 7/18/2024 9:00:02 PM

Modified By: Katrina Gustafson

Modified On: 1/29/2025 3:32:22 PM

Business hours

Sun:10:00 AM- 10:00 PM

Mon:5:00 PM- 10:00 PM

Tues:12:00 PM- 10:00 PM

Wed:12:00 PM- 11:00 PM

Thurs:12:00 PM- 11:00 PM

Fri:12:00 PM- 11:00 PM

Sat:10:00 AM- 11:00 PM



SUPERSEDED

SECTION 1: Site Plan


- This Site Plan form is required to be uploaded in the **"Roadway Site Plan"** field of your online application.
- Refer to the [How to Apply](#) page in the Dining Out NYC website for more information about the application process.

Identify Permitted Parking Location:

- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
 1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking.
 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.
 3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb.

-  P1- Parking Space
-  P2- Loading Area
-  P3- Floating Parking Lane

Use the space below to draw or upload your Site Plan representing your cafe perimeters, furniture, and clearances.

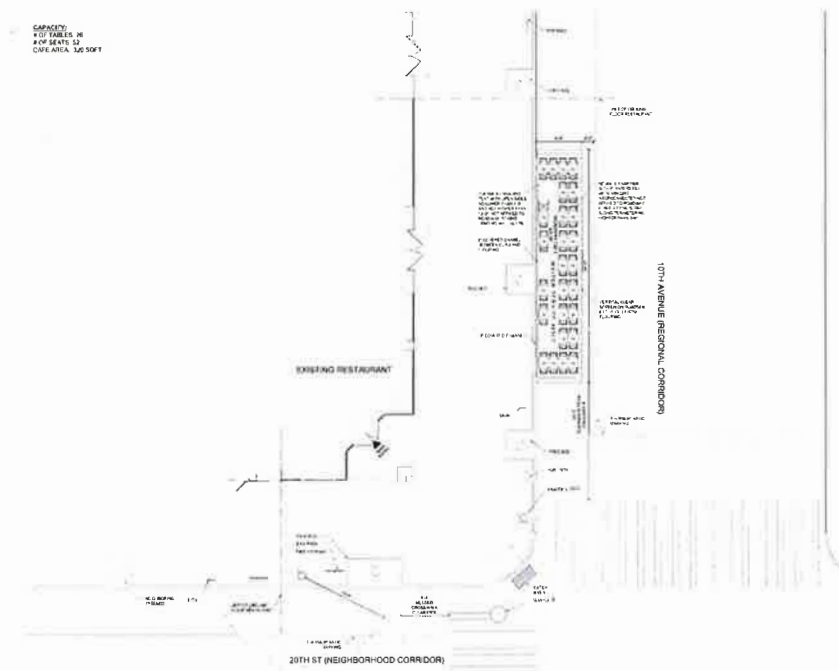

Length of roadway cafe: 40-0" feet

Width of roadway cafe: 8'-0" feet



Roadway Cafe Site Plan Form

Applicant Name: Chris Paraskevaldes

Restaurant Name: Cookshop

FSEP Number: 41092609

Drawing Requirements

Food service establishment frontage shown by:

- Line representing space occupied in building
- Labels
- Length

Street names:

- Labels on each street

Sidewalk shown as:

- Line representing street curb
- Width measured from building line to curb line

Roadway shown as:

- Lines indicating parking lane
- Width of parking lane

Cafe perimeter shown as:

- Lines indicating perimeter
- Length and width of all three sides

Set-up furniture (tables, chairs, etc.) shown as:

- Lines or symbols at approximate location within setup

Elements or objects shown as:

- Lines or symbols
- Labels
- Distance from cafe perimeter

Utility coverings shown as:

- Symbols representing the approximate shape of the covering within the setup

☐ MANHOLE COVER
☒ UTILITY COVERING

SECTION 2: Required Clearances

- * Please provide distances from the following objects.
- * Only provide a distance if the listed object is within 15 feet of your proposed setup.
- * Leave box blank if not applicable.
- * Refer to the [Setup Guides](#) in the Dining Out NYC website for more information regarding clearances.

Elements with minimum 15 feet clearance from roadway cafe:

- ☐ R01- Subway Stair: Open End _____ feet
- ☐ R02- Fire Hydrant _____ feet

Elements with minimum 10 feet clearance from roadway cafe:

- ☐ R03- Subway Elevator Entrance _____ feet
- ☐ R04- FDNY Curb Cut _____ feet
- ☐ R05- MTA Curb Cut _____ feet

Elements with minimum 5 feet clearance from roadway cafe:

- ☐ R06- Curb Cut _____ feet
- ☐ R07- Emergency Exit Hatch _____ feet
- ☐ R08- Subway Stair: Closed End _____ feet
- ☐ R09- Subway Elevator: Non-Entry _____ feet
- ☐ R10- Bus Stop Pole: _____ feet
- Non- Approaching Side _____ feet
- ☐ R11- CitiBike/Bike Share Station _____ feet
- ☐ R12- Bike Corral _____ feet
- ☐ R13- Micromobility Station _____ feet
- ☐ R14- Drainage Infrastructure _____ feet

Elements with minimum 3 feet clearance from roadway cafe:

- ☐ R15- Elevated Train Infrastructure _____ feet
- ☐ R16- Transformer Vault _____ feet

Elements with minimum 1 foot and 6 inches clearance from roadway cafe:

- ☐ R17- Vent Infrastructure _____ feet

Elements with minimum 6 inches clearance from roadway cafe:

- ☒ R18- Thermoplastic Marking 2' feet

Roadway cafe distance from crosswalks:

- ☐ R19- Adjacent to non-approaching side of crosswalk (min. 8 foot distance) _____ feet
- ☒ R20- Adjacent to approaching (stopping) side of crosswalk (min. 20 foot distance) 20 feet
- ☐ R21- No crosswalk present (maintain 20 feet from curb line of intersecting street) _____ feet



SECTION 3: Material Requirements

- * Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
- * Refer to the [Setup Guides](#) in the Dining Out NYC website for more information regarding materials.

Materials Checklist:

Required

Barriers

- ☒ Maintained on all sides of the cafe except the side fronting the ground floor restaurant.
- ☒ Not permanently affixed to the roadway.
- ☒ 30-42 inches tall (excluding planting), and at least 4 inches in width.
- ☒ Barriers are interconnected with each other.
- ☒ Any cladding over the barriers is securely fastened or affixed.
- ☒ Minimum 4 inches wide reflective strip on each barrier on the outward facing side.
- ☒ Water-filled with a minimum of 150 pounds per linear foot of barrier length.
- ☐ If your proposed barriers will utilize fill materials other than water please check this box. This may require additional information from the applicant and further review by the Dining Out NYC team, as well as supporting DOT units and City agencies.

Optional- Only check the material categories you intend to use in your roadway cafe

Flooring

- ☒ Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning.
- ☒ Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and compliant with applicable accessibility requirements.
- ☒ Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage.

Furnishings

- ☒ Lightweight and easily movable.

Vertical Screenings

- ☒ Located between the barrier and 6 feet above the cafe base or floor.
- ☒ Located on the roadway facing side, does not extend beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers.
- ☒ Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.
- ☒ If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

Overhead Coverings/ Umbrellas

- ☒ Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe.
- ☒ Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are of sufficient size and strength, made of durable materials, and free of defects.
- ☒ Easily removable, comprised of fire-grade and wind resistant materials.
- ☒ If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

Lighting and Electrical Connections

- ☒ Any lighting is outdoor rated, properly secured, and lightweight.
- ☒ At least 14 feet above sidewalk, and 18 feet above roadway.
- ☒ Not attached to any City property, including street trees.
- ☒ Electrical work complies with the applicable requirements set forth in the DOT's rules and the New York City Electrical Code.

- ☐ Please check this box if you are submitting additional documents for review. Documents may include technical drawings prepared by a licensed professional.

- This Site Plan form is required to be uploaded in the “Roadway Site Plan” field of your online application.
- Refer to the [How to Apply](#) page in the Dining Out NYC website for more information about the application process.

Identify Permitted Parking Location:

- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
 1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking.
 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.
 3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb.

*REVISED SITE PLAN

- ☐ P1- Parking Space
- ☐ P2- Loading Area
- ☐ P3- Floating Parking Lane

Use the space below to draw or upload your Site Plan representing your cafe perimeters, furniture, and clearances.

REVISED STI

Length of roadway cafe: _____feet Width of roadway cafe: _____feet



Roadway Cafe Site Plan Form

Applicant Name: _____

Restaurant Name: _____

FSEP Number: _____

Drawing Requirements

Food service establishment frontage shown by:

- Line representing space occupied in building
- Labels
- Length

Street names:

- Labels on each street

Sidewalk shown as:

- Line representing street curb
- Width measured from building line to curb line

Roadway shown as:

- Lines indicating parking lane
- Width of parking lane

Cafe perimeter shown as:

- Lines indicating perimeter
- Length and width of all three sides

Set-up furniture (tables, chairs, etc.) shown as:

- Lines or symbols at approximate location within setup

Elements or objects shown as:

- Lines or symbols
- Labels
- Distance from cafe perimeter

Utility coverings shown as:

- Symbols representing the approximate shape of the covering within the setup

- MANHOLE COVER
- UTILITY COVERING

SECTION 2: Required Clearances

- Please provide distances from the following objects.
- Only provide a distance if the listed object is within 15 feet of your proposed setup.
- Leave box blank if not applicable.
- Refer to the [Setup Guides](#) in the Dining Out NYC website for more information regarding clearances.

Elements with minimum 15 feet clearance from roadway cafe:

☐ R01- Subway Stair: Open End

☐ R02- Fire Hydrant

feet

feet

Elements with minimum 10 feet clearance from roadway cafe:

☐ R03- Subway Elevator Entrance

☐ R04- FDNY Curb Cut

☐ R05- MTA Curb Cut

feet

feet

feet

Elements with minimum 5 feet clearance from roadway cafe:

☐ R06- Curb Cut

☐ R07- Emergency Exit Hatch

☐ R08- Subway Stair: Closed End

☐ R09- Subway Elevator: Non-Entry

☐ R10- Bus Stop Pole:
Non- Approaching Side

feet

feet

feet

feet

feet

☐ R11- CitiBike/Bike Share Station

☐ R12- Bike Corral

☐ R13- Micromobility Station

☐ R14- Drainage Infrastructure

feet

feet

feet

feet

Elements with minimum 3 feet clearance from roadway cafe:

☐ R15- Elevated Train Infrastructure

☐ R16- Transformer Vault

feet

feet

Elements with minimum 1 foot and 6 inches clearance from roadway cafe:

☐ R17- Vent Infrastructure

feet

Elements with minimum 6 inches clearance from roadway cafe:

☐ R18- Thermoplastic Marking

feet

Roadway cafe distance from crosswalks:

☐ R19- Adjacent to non-approaching side of crosswalk (min. 8 foot distance)


feet

☐ R20- Adjacent to approaching (stopping) side of crosswalk (min. 20 foot distance)

feet

☐ R21- No crosswalk present (maintain 20 feet from curb line of intersecting street)

feet

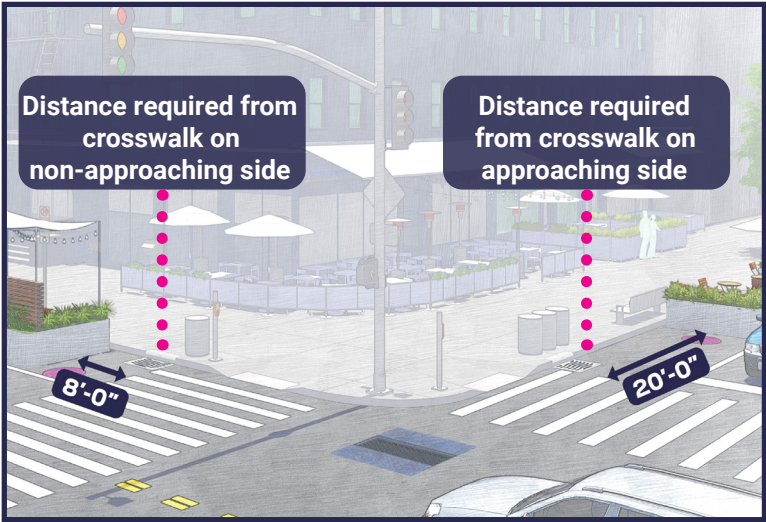

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
- Refer to the [Setup Guides](#) in the Dining Out NYC website for more information regarding materials.

Materials Checklist:

☐ Barriers

Required

☐ Maintained on all sides of the cafe except the side fronting the ground floor restaurant.

☐ Not permanently affixed to the roadway.

☐ 30-42 inches tall (excluding planting), and at least 4 inches in width.

☐ Barriers are interconnected with each other.

☐ Any cladding over the barriers is securely fastened or affixed.

☐ Minimum 4 inches wide reflective strip on each barrier on the outward facing side.

☐ Water-filled with a minimum of 150 pounds per linear foot of barrier length.

☐ If your proposed barriers will utilize fill materials other than water please check this box. This may require additional information from the applicant and further review by the Dining Out NYC team, as well as supporting DOT units and City agencies.

Optional- Only check the material categories you intend to use in your roadway cafe

☐ Flooring

☐ Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning.

☐ Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and compliant with applicable accessibility requirements.

☐ Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage.

☐ Furnishings

☐ Lightweight and easily movable.

☐ Vertical Screenings

☐ Located between the barrier and 6 feet above the cafe base or floor.

☐ Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers.

☐ Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.

☐ If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

☐ Overhead Coverings/ Umbrellas

☐ Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe.

☐ Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are of sufficient size and strength, made of durable materials, and free of defects.

☐ Easily removable, comprised of fire-grade and wind resistant materials.

☐ If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

☐ Lighting and Electrical Connections

☐ Any lighting is outdoor rated, properly secured, and lightweight.

☐ At least 14 feet above sidewalk, and 18 feet above roadway.

☐ Not attached to any City property, including street trees.

☐ Electrical work complies with the applicable requirements set forth in the DOT's rules and the New York City Electrical Code.

☐ Please check this box if you are submitting additional documents for review. Documents may include technical drawings prepared by a licensed professional.